



SANY

CRAWLER CRANE

SCC1500C



CRAWLER CRANE

CONTENT

P3

SCC1500C Crawler Crane

- Basic Dimensions of the Whole Machine
- Performance Data
- Transportation Dimensions
- Assembly Diagram

P11

Specifications

- Uperworks
- Undercarriage
- Operation Device
- Safety Device


P20

Combination of operating conditions


- Operating Condition Combination
- H Operating Condition of Boom
- FJ Operating Condition of Fixed Jib

SCC1500C

04	Basic Dimensions of the Whole Machine
05	Performance Data
06	Transportation Dimensions
10	Assembly Diagram

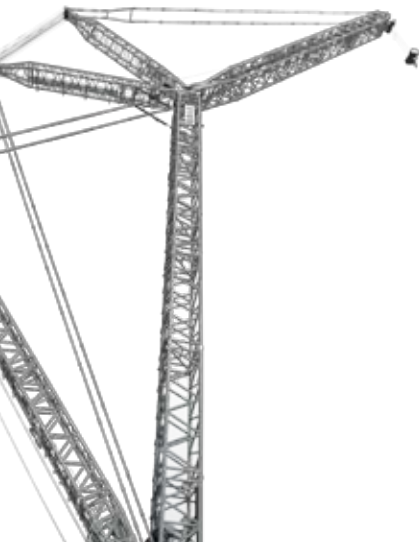

BASIC DIMENSIONS OF THE WHOLE MACHINE

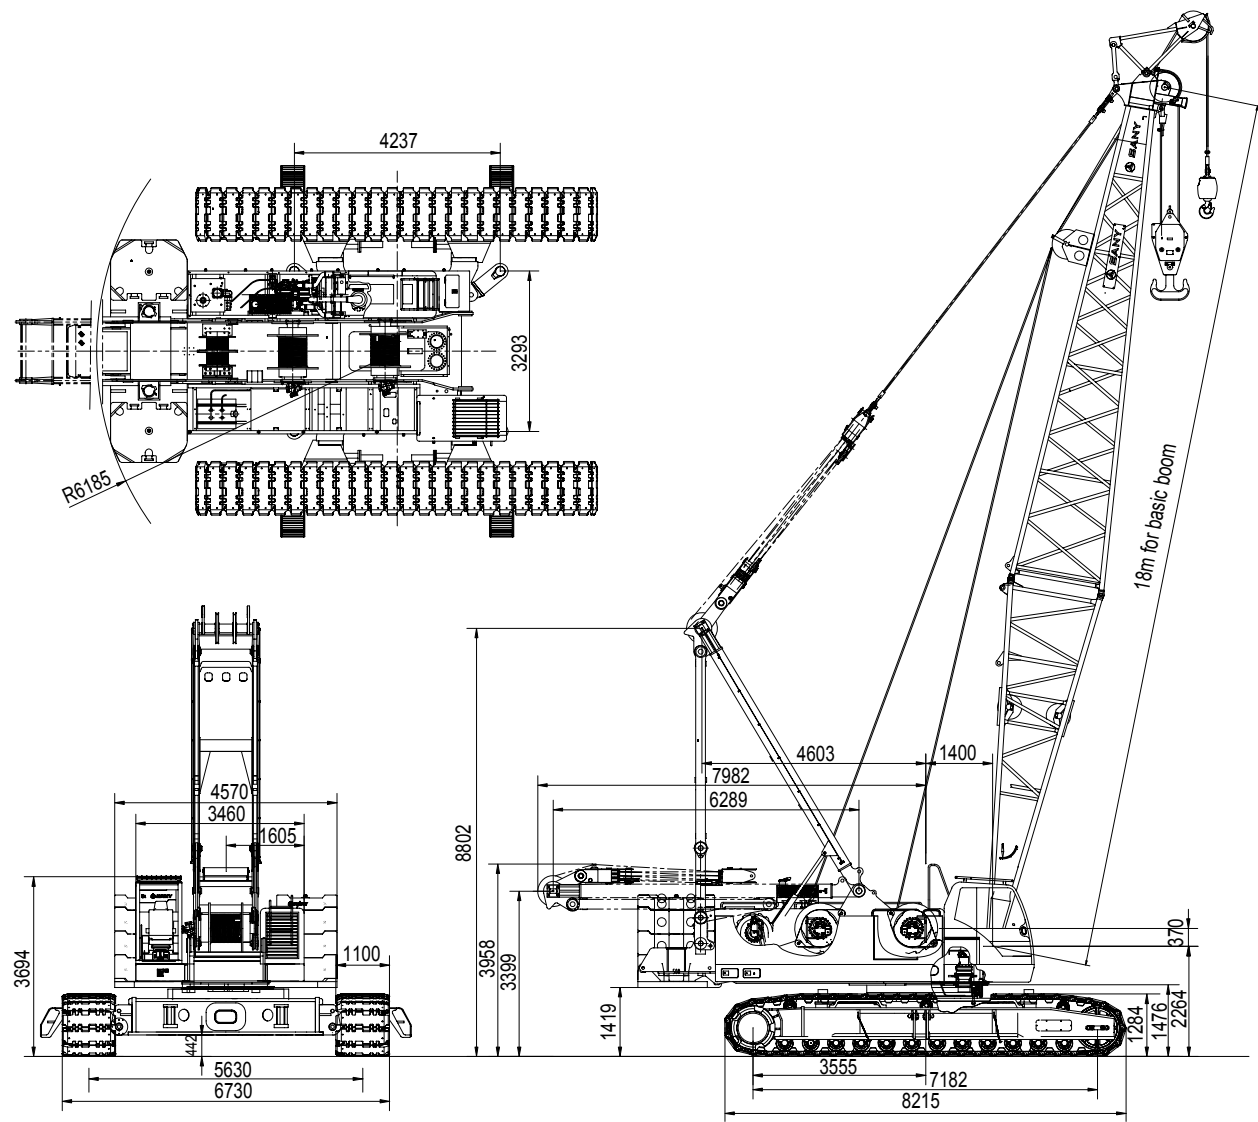


Basic Dimensions of the Whole Machine of SCC1500C crawler crane

PERFORMANCE DATA

Main technical parameters of 1500C crawler crane			
Performance index		Unit	Data
Boom operating condition	Maximum lifting capacity	t	150
	Boom length	m	18~81
	Boom luffing angle	°	30~ 80
Fixed jib operating condition	Max. length boom + Max. length jib	m	(69+31) / (75+13)
	Angle between fixed boom and jib	°	15, 30
Speed parameters	Rope speed of main and auxiliary winches	m/min	0~125
	Rope speed of Luffing winch(outermost)	m/min	(0~24) ×2
	Slewing speed	rpm	0~2
	Traveling speed	km/h	0~1.2/0~0.6(two speeds)
	Gradeability	%	30
Engine	Output power/rated rotational speed	kW/rpm	242 /2100
Transportation parameter	Maximum transport weight of single unit	t	50.2
	Transportation dimension (length*width*height)	mm	10230×3470×3500
Other parameters	Average ground pressure	MPa	0.093


TRANSPORT DIMENSIONS

Basic machine (without boom base) ×1	
Length	10.23m
Width	3.47m
Height	3.50m
Weight	50.2t
Basic machine (with boom base) ×1	
Length	16.99m
Width	3.47m
Height	3.50m
Weight	53.6t
Track frame ×2	
Length	8.25m
Width	1.54m
Height	1.29m
Weight	21.7t
Boom tip ×1	
Length	10.91m
Width	2.21m
Height	2.35m
Weight	2.28t
Boom base ×1	
Length	7.76m
Width	2.21m
Height	2.13m
Weight	4.2t
3m boom insert ×1	
Length	3.14m
Width	2.21m
Height	2.01m
Weight	0.66t
6m boom insert ×3	
Length	6.14m
Width	2.21m
Height	2.01m
Weight	1.11t

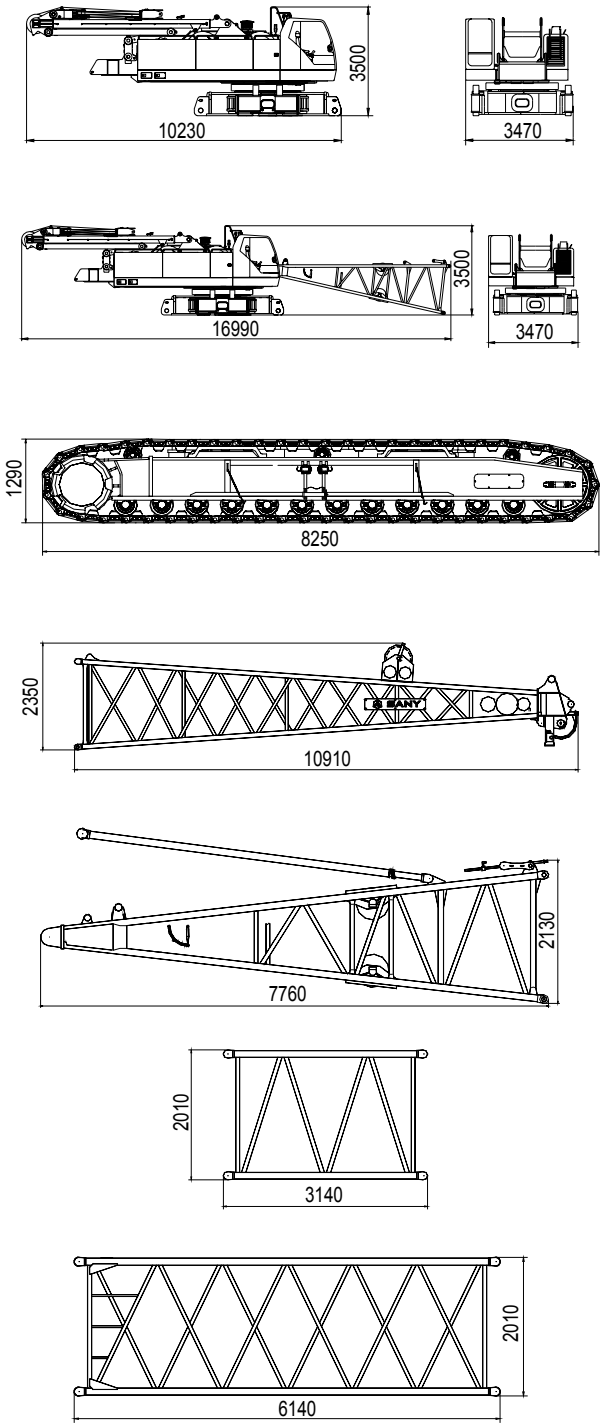







TRANSPORT DIMENSIONS

9m boom insert ×1	
Length	9.14m
Width	2.21m
Height	2.16m
Weight	1.6t
12m boom insert ×2	
Length	12.14m
Width	2.21m
Height	2.01m
Weight	1.91t
Jib tip ×1	
Length	5.41m
Width	1.01m
Height	1.17m
Weight	0.27t
Jib base ×1	
Length	5.11m
Width	1.03m
Height	0.83m
Weight	0.27t
3m jib insert ×1	
Length	3.08m
Width	1.01m
Height	0.83m
Weight	0.14t
6m jib insert ×3	
Length	6.08m
Width	1.01m
Height	0.83m
Weight	0.25t
Extension jib ×1	
Length	2.15m
Width	1.04m
Height	1.12m
Weight	0.36t

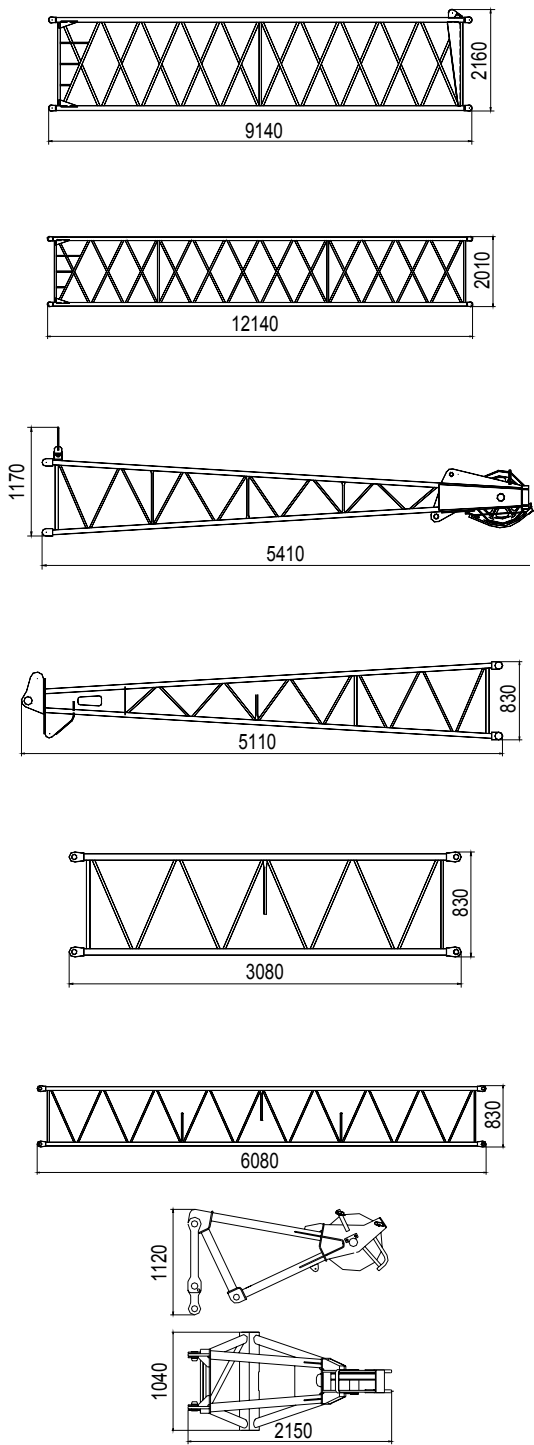




TRANSPORT DIMENSIONS

Fixed jib strut	×1
Length	5.44m
Width	1.14m
Height	0.21m
Weight	0.4t
Counterweight tray	×1
Length	4.43m
Width	1.76m
Height	0.49m
Weight	13t
Counterweight block	×8
Length	1.97m
Width	1.90m
Height	0.69m
Weight	5.5t
Counterweight block	×2
Length	1.97m
Width	1.90m
Height	0.35m
Weight	3.0t
150t hook block	×1
Length	0.89m
Width	1.03m
Height	2.44m
Weight	2.8t
100t hook block	×1
Length	0.93m
Width	0.84m
Height	2.36m
Weight	1.99t

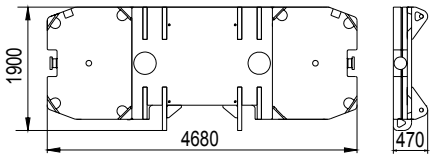

TRANSPORT DIMENSIONS

50t hook block	×1
Length	0.89m
Width	0.47m
Height	1.95m
Weight	1.06t
25t hook block	×1
Length	0.90m
Width	0.37m
Height	1.87m
Weight	0.79t
13.5t hook block	×1
Length	0.50m
Width	0.50m
Height	0.95m
Weight	0.53t




Notes: 1.Transportation dimensions of main parts are not drawn to proproction, The dimensions in the sketch are design value exculding packages.
2.The weight is design value and the weight tolerance caused by manufacturing error is ±2%.

ASSEMBLY DIAGRAM


The machine has self-assembly function of track traveling device. The track traveling device should be first mounted before counterweight when assembly. However, counterweight dismantlement should be done before track traveling device for disassembly. Please refer to following figure for detailed operation process.

1) Self-assembly

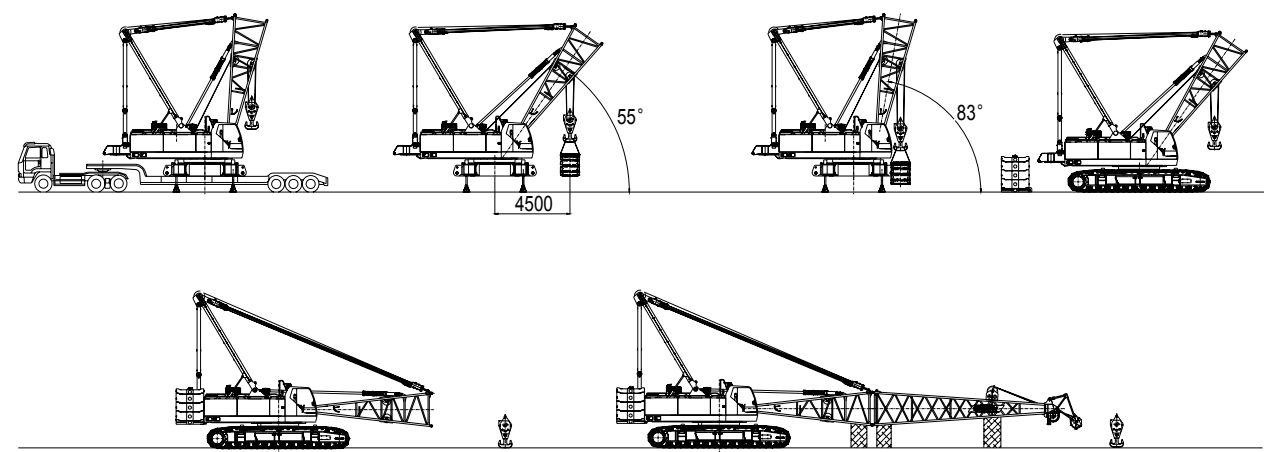

Self- assembly sketch (reverse steps for disassembly)

2) Installation of fixed jib operation support

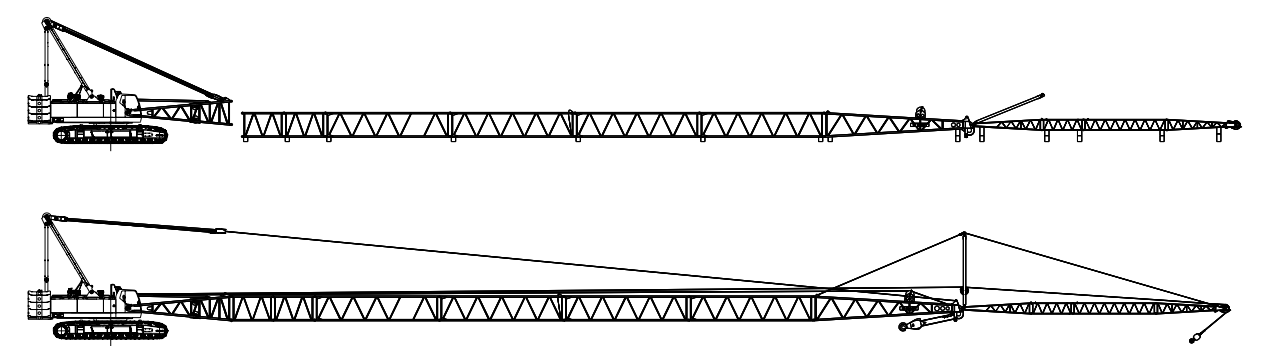

Installation sketch of fixed jib

SCC1500C

- | | |
|----|------------------|
| 12 | Upperworks |
| 15 | Undercarriage |
| 16 | Operation Device |
| 17 | Safety device |

UPERWORKS

1) Engine

- Imported Cummins QSL9, inline 6-cylinders.
- Rated power / speed: 242KW/2100rpm;
- Maximum torque: 1424N·m/1500rpm;
- Emission standards:European tier 3;
- Air filter: double filtration system composed of air pre-filter and air filter;
- Fuel tank: capacity of 400L with oil leveler and electronic display for fuel oil volume;
- Emission standard: Tier III.

2) Electrical control system

- Controller, combination instrument, engine, torque limiter, remote control terminal apply CAN bus techniques for data communication.
- Combined instrument can display parameters such as engine rotating speed, fuel quantity, machine oil pressure, servo pressure, wind speed, the engine operating working hours and primary winch lock, primary-to-amplitude winch lock, turn lock and other working conditions.
- Reliability: International or industrial famous brands shall be used for main electric devices. They mainly include load moment limiter, controller, displayer, sensor, monitoring switch, control switch, electric wires and cables.
- Comfort: Electric parameters of various points can be shown by instruments, including the operation parameters such as engine speed, fuel oil volume, machine oil pressure, servo pressure, wind speed and operation time etc. and the working state such as main winch locking, boom locking and slewing locking. Installation and operation modes can be separated to lock the main hydraulic action and to lighten drivers’ operation strength.
- Advancement: It adopts the overall CAN bus system, load power limit control, redundancy communication check and optional global positioning and remote monitoring program.

3) Hydraulic System

Configuration of hydraulic system: adopt the world-renowned brands of hydraulic systems, including the main pump, main valve, control handle and motor reducer. It is efficient, energy saving, stable and reliable.

It has excellent micro-rotation and performance improvement, load sensing; limit load regulation makes the operation more stable.

Adopt controlled hydraulic oil cooling system independently.

4) Main and auxiliary hoisting mechanisms

- Main or auxiliary winch has advantages such as individual drive, compact structure, easy installation, low abrasion and maintenance-free embedded wet brake so as to guarantee winch safety.
- Variable hydraulic motor shall realize the maximum winch speed by automatic displacement adjustment according to load.
- High-quality stainless steel wire rope shall be adopted with features of high hoisting safety and service life.
- Bag type rope head shall be adopted for convenient detachment & installation of steel wire rope. Pawl and ratchet locking device shall be fitted for safer hoisting.

Main lifting device

Reel diameter	496mm
Rated tension of single wire speed of the outermost layer	0~125m/min
Diameter of steel wire rope	26mm
Length of steel wire rope of main winch	350m
Rated single line pull	13.1t

Auxiliary lifting device

Reel diameter	496mm
Rated tension of single wire speed of the outermost layer	0~125m/min
Diameter of steel wire rope	26mm
Length of auxiliary winch steel wire rope	300m
Rated single line pull	13.1t

5) Slewing mechanism

- It is driven by slewing motor and buffered hydraulically to provide 360° rotation.
- Brake: Normally closed, embedded, wet type, and spring disc-type brake, with spring force braking and oil pressure releasing;
- Locking: Locking device is employed for non-impact on the slewing upper part during the load traveling and transportation process.
- Slewing ring: 3-rows roller column type slewing ring;
- Slewing speed: 0-2.0r/min

6) Luffing mechanism

It is fitted with double luffing winch drums, with ratchet wheel & pawl locking device for middle spacer plate of double drum so as to guarantee parking safety of suspension boom under non-operation status.

Luffing mechanism

Reel diameter	460mm
Rated tension of single wire speed of the outermost layer	(0~24)×2 m/min
Diameter of steel wire rope	20mm
Length of steel wire rope of luffing winch	320m
Rated single line pull	9.73t

7) Counterweight

Name	Quantity	Weight of single part	Total weight
Counterweight block	6	5.5	33
Counterweight block	2	3	6
Counterweight tray	1	13	13
Total nominal counterweight (kg)			52
Additional counterweight	2	5.5	11
Total weight of all counterweight (kg)			63

8) Cab

- Newly designed sliding-door cab, large area windows; with near and far beam headlamp, rear-view mirrors and more open vision;
- Installed with heating and cool air conditioning, MP3 player; seats, control handle; control button layout designed according to ergonomic; thus operation is more comfortable.

9) Control operation

- All actions of crawler traveling device are realized by traveling pedal (or control lever). The left track can be driven by the left traveling pedal (control lever) and right track by the right traveling pedal (control lever); the engine rotational speed can be controlled by the foot or hand throttle. Startup switch of engine is located on the right armrest box. Luffing or main winch control lever is located on the right armrest box and auxiliary winch and slewing control lever on the left box. Slewing locking button is located at the left side of left armrest box. The auxiliary operation box is at the left front of seat, with all switches on its control panel operated manually to realize corresponding functions
- Traveling pedal (control lever) has automatic positive function. That is, positive control direction is that of operator.

LOWERWORKS

1) Crawler traveling device

The track frame on both sides adopts separate walk-driven devices. Walking motor can achieve lineal walk and turn of the whole machine through motor reducer and driving wheel.

2) Traveling brake

Built-in, wet, spring-loaded normal-engaged disk brake applies braking through spring force and release braking through oil pressure.

3) Track shoe

High-strength alloy steel track link with longer life.

4) Base

Hydraulic cylinder is to drive power pin for connection to crawler system to facilitate installation and detachment. High-strength welded frame structure.

5) Traveling speed

- Low-speed:0.6 km/h
- High-speed:1.2 km/h

OPERATION DEVICE

1) Boom

- Truss structures; the main chord adopts high strength structure steel; each section is connected with pins.
- Basic boom: 7.5m tip +10.5m base
- Boom insert: 3m'× 1,6m× 3,9m× 2,12m× 2.
- Boom Length: 18m~ 81m.

2) Fixed jib

- Truss structures; the main chord adopts high strength structure steel; each section is connected with pins:
- Basic boom: 5m tip +5m base
- Boom insert: 3m×1, 6m×3;
- Jib Length: 13m~ 31m' ;
- The longest boom + jib: 69m boom +31m jib;75m boom + 13m jib.

3) Hook Block

- | | | |
|---------------------------|-------|------------|
| ■ Standard configuration: | 150t | hook block |
| | 50t | hook block |
| | 13.5t | hook block |
| ■ Optional configuration: | 25t | hook block |
| | 100t | hook block |

Notes: The above operating devices are safe configuration; order contract shall prevail for specific configuration.

SAFETY DEVICE

1) Load Moment Indicato

- Standard configuration, optional manufacturer.
- A completely separate and secure computer-controlled operating system; LMI can automatically detect the load of cranes and the angle of lifting arm and show its rated load and actual load, working radius and boom angle.
- Functions: can real-time display rated load, actual load, working radius and boom angle, height and other data at current status of the crane. Automatically detect luffing angle transfinite and load transfinite and other dynamic data, and give real-time alarm and limit movement.
- It mainly consists of display, basic machine box, angle sensor and force sensor.
- Components: display, machine, monitor, angle sensors, force sensors etc.

2) Three-color load warning light

- There is green, yellow and red load warning lights, simultaneous displaying real-time load.
- When the actual load is less than 92% of rated load, the "green" light is on; when the actual load is between 92% and 100% of the rated load, the "yellow" light is on, the pre-warning lights will flash and intermittent alarm will be issued; When the actual load reaches 100% of rated load, the "red" light is on, the pre-warning lights will flash and intermittent alarm will be issued; When the actual load reaches 102% of rated load, the system will automatically cut off the trend of crane operation towards danger.

3) Anti over-discharge equipments of main and auxillary hoists

It is composed of movement trigger device and proximity switches installed in roll to prevent wire rope from being over-decentralized. When the wire rope is over-decentralized near the last three hoops, limit switch will work, the system will alarm through buzzer, alarm information will be displayed in instrument cluster and automatically stop the decentralization movement of hoist.

4) Anti-pulley equipments of main and auxillary winch

Composed of limit switch, hammer etc. on jib to prevent excessive promotion of hook block. When the lifting hook raises to a certain height, limit switch will work, the buzzer on the control panel will alarm, meanwhile the failure indicator blinks and automatically stop the lifting operation of hook block.

5) Switch between installation/operation mode

In installation mode, anti roll device, lifting boom inhibiting device, load moment indicator do not work to facilitate crane installation. In operation mode, all the safety limit devices are working.

6) Boom inhibiting device

When the elevation angle of lifting arm is greater than 78° , the buzzer will alarm, and boom elevation control will be closed. This protection is controlled by load moment limiter and position switch.

7) Boom back-stop device

- The high pressure of back-stopping cylinder should be overcome when the boom tilts backwards. Hydraulic system can compensate the high-pressure oil when the boom stretches out forwards, to tighten the pendant rod of boom, thus preventing the vibration and back-stop during operation process.
- There is a pair of back-stop oil cylinders on the rear mast of luffing jib and there is also a pair of oil cylinders on the front mast of luffing jib to prevent the mast backwards and to tighten the luffing wire rope of luffing jib.
- Mechanical Back-stop device shall be set for jib angle of 8° between jib and extension line of boom to avoid tipback.

8) Brake of winch mechanism

Spring-loaded disk-type brake which is normally closed shall be employed for all winch brakes, which is characterized with the large brake force, maintenance-free, safe and reliable usage and long service life.

9) Closed circuit TV monitoring system

Operator in cab can monitor the real-time status of luffing drum, hoisting winch drum and vehicle tail by video camera with high resolution.

10) Fault self-diagnosis system

It can generate fault and alarm information automatically to review the operation & electrification status of electrical lines so as to eliminate the electrical fault quickly.

11) Boom warning light

It is installed on the top of boom to overhead prompt, without stopping the operation of boom at night.

12) Wind speed indicator

It is installed on the top of boom for the real-time monitoring of wind speed and then transfers the data to the cab for displaying them on the monitor.

13) Leveling gauge

Electronic leveling gauge can display tilt angle of upper works on monitor.

14) Boom angle sign plate

Pendulum angle indicator device is located in boom base next to the cab for operator convenience.

15) Hook latch

Each kind of lifting hook is fitted with baffle to avoid the steel wire falling-off.

16) Operation warning

Press the horn to give an alarm before any operation of crane to prompt to other persons pay attention to safety.

17) Traveling or slewing prompt

Operation warning lamp flickers and slewing buzzer rings during traveling or slewing traveling.

18) Permissible functional handle

All other function control handles will fail if the permissible functional handle can not be at the proper position, to avoid mis-operation caused by body collision when getting-on/off.

19) Protection while leaving seat

All controls can not play an function to avoid some mis-operations effectively if operators do not stand on seats.

20) Automatic reversing driving

No matter the relative position between superstructure and undercarriage, the entire machine moves forwards if pushing the driving pedal forwards and backwards if pushing backwards.

21) Engine power limit load regulation and stall protection

Real-time monitoring shall be done for output power of engine. Power load can be adjusted to avoid engine suppression and stalling.


22) Monitor displayer

High-resolution true color displayer and electric human-machine dialog displayer terminal can display operation parameters of engine system, operation status and parameters of hydraulic system, parameter status of various detection points and output points of electric system as well as real-time parameters under various ambient conditions.

SCC1500C


Operating Condition Combination	21
H Operating Condition of Boom	22
FJ Operating Condition of Fixed Jib	23

OPERATING CONDITION COMBINATION

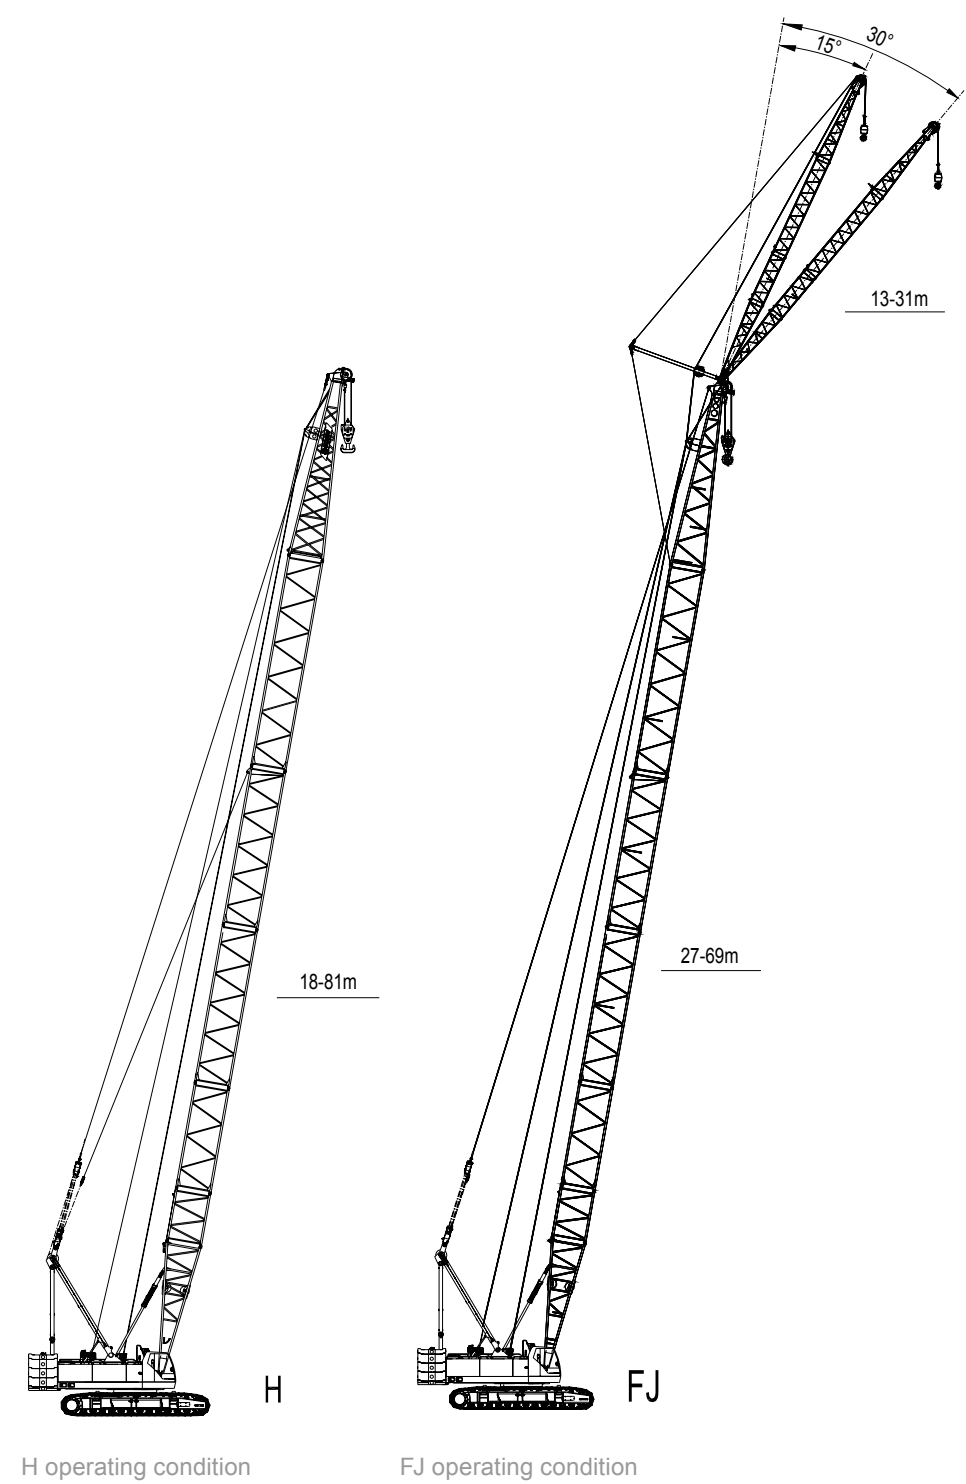


H OPERATING CONDITION OF BOOM

Boom length (m)	Boom insert			
	3 m	6 m	9 m	12 m
18	-	-	-	-
21	1	-	-	-
24	-	1	-	-
27	1	1	-	-
30	1	-	1	-
	-	2	-	-
33	1	2	-	-
	-	1	1	-
36	1	1	1	-
	1	1	-	1
39	1	-	2	-
	-	2	1	-
42	1	2	1	-
	1	-	1	1
	-	1	2	-
45	1	1	2	-
	-	1	1	1
48	1	1	1	1
	1	1	-	2
51	1	-	2	1
	-	2	1	1
54	1	2	1	1
	1	-	1	2
	-	2	-	2
57	1	1	2	1
	-	1	1	2
60	1	1	1	2
	1	-	2	2
63	1	2	2	1
66	1	2	1	2
69	1	1	2	2
	1	3	2	1
72	-	2	2	2
	1	3	1	2
75	1	2	2	2
78	-	3	2	2
81	1	3	2	2

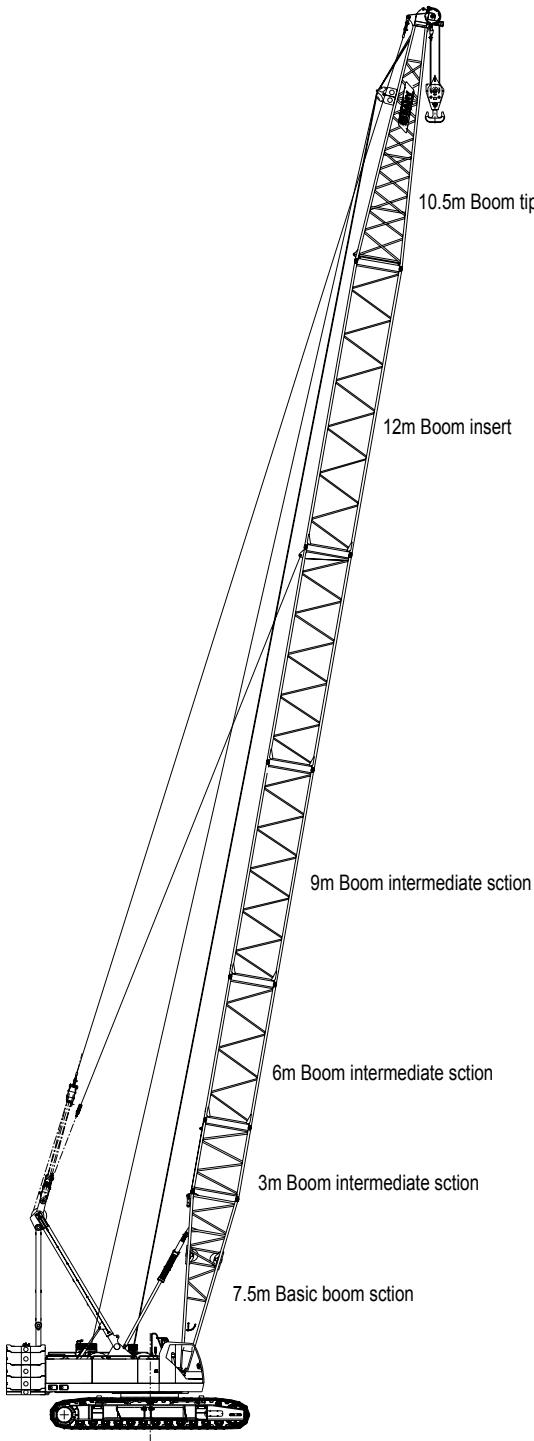

BOOM OPERATION SCOPE

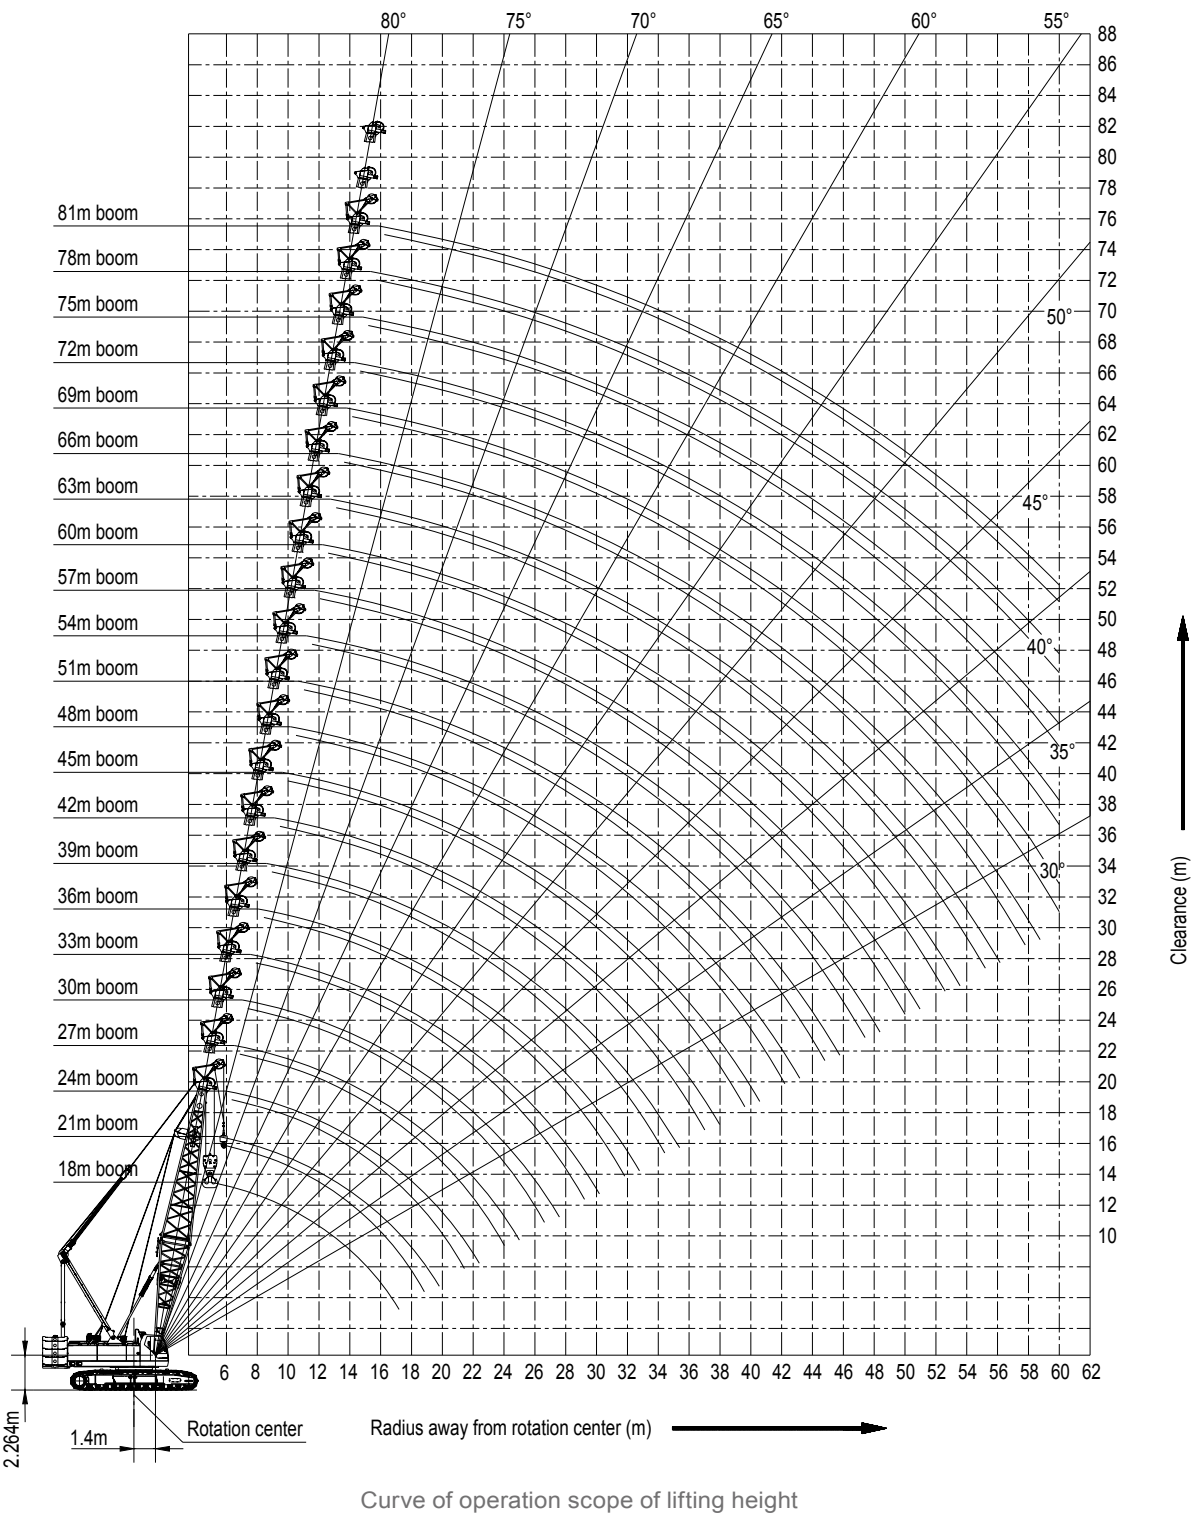

BOOM LOAD CHART (H OPERATING CONDITION)

Note:

1. Filling part of 25% orange level in bold frame in the table is determined by strength. Italic value filled by 40% orange level refers to the operating conditions with standard and additional counterweights.

2. Rated load in the table is the maximum permissible value under the condition that the non-traveling heavy load is slowly and stably lifted from the solid and flat ground.

3. Rated load shown in the table is calculated based on the 75% of tilting load under wind speed of less than 9.8m/s. Value unit expressed by load is “t” . Actual hoisting weight is value by deducting mass of main or auxiliary lifting hook from rated hoisting weight in the table. Weight of lifting hook is shown as follows:

■ 150t lifting hook -2.8t

■ 100t lifting hook --1.99t

■ 50t lifting hook --1.06t

■ 25t lifting hook -0.79t

■ 13.5t lifting hook -0.53t
4. All values in load chatr are available for 360° rotation.

5. Length of installable boom is from 18m to 81m.

6. It is selected operating condition with additional counterweight (52t+11t) and it does not belong to standard operating conditions. Length of boom with additional counterweight allowed is from 45m to 81m.

BOOM LOAD CHART (H OPERATING CONDITION)

Boom load chart (H operating condition) 1/3

Unit: (t)

Boom length (m) Radius (m)	18	21	24	27	30	33	36	39	42	45	
5	155/4.94	135.3/5.46									
6	144.0	129.8	120.3/5.95	106.1/6.5							
7	124.5	118.2	107.8	101.8	95.7	85.8/7.54					
8	99.7	99.6	99.4	99.2	90.1	83.9	77.9/8.07	70.8/8.58			
9	83.0	82.8	82.7	82.4	82.3	82.0	74.7	68.7	64.5/9.1	58.7/9.63	58.7/9.63
10	70.9	70.8	70.6	70.4	70.2	70.0	69.8	64.8	62.2	57.9	57.9
11	61.9	61.7	61.5	61.3	61.1	60.9	60.7	61.1	57.8	56.7	56.7
12	54.8	54.6	54.5	54.2	54.1	53.8	53.6	53.4	53.3	53.1	55.5
13	49.1	48.9	48.8	48.5	48.4	48.1	47.9	47.8	47.6	47.4	54.3
14	44.5	44.3	44.1	43.8	43.7	43.4	43.3	43.1	42.9	42.7	49.0
15	40.6	40.4	40.2	40.0	39.8	39.5	39.4	39.2	39.0	38.8	44.6
16	37.3	37.1	36.9	36.7	36.5	36.2	36.1	35.9	35.7	35.5	40.8
17	34/17.19	34.3	34.1	33.8	33.7	33.4	33.2	33.0	32.9	32.7	37.6
18		31.8	31.7	31.4	31.2	31.0	30.8	30.6	30.4	30.2	34.8
19		29.7	29.5	29.2	29.1	28.8	28.6	28.4	28.3	28.1	32.4
20		28.1/19.8	27.6	27.3	27.2	26.9	26.7	26.5	26.4	26.2	30.2
21			25.9	25.6	25.5	25.2	25.0	24.8	24.7	24.5	28.3
22			23.9/22.4	24.1	24.0	23.7	23.5	23.3	23.2	23.0	26.6
23				22.8	22.6	22.3	22.2	22.0	21.8	21.6	25.1
24				21.5	21.4	21.1	20.9	20.7	20.6	20.4	23.7
26				20.4/25	19.2	18.9	18.8	18.6	18.4	18.2	21.2
28					17.8/27.6	17.1	17.0	16.8	16.6	16.4	19.2
30						15.5/30.2	15.4	15.2	15.1	14.9	17.4
32							14.1	13.9	13.7	13.5	15.9
34							13.6/32.8	12.7	12.6	12.4	14.6
36								12/35.38	11.6	11.3	13.4
38									10.7/37.95	10.4	12.4
40										9.4/40.58	11.3/40.58
Counterweight	52	52	52	52	52	52	52	52	52	52	52+11
Multiply	14	12	10	9	8	7	6	6	5	5	5

BOOM LOAD CHART (H OPERATING CONDITION)

Boom load chart (H operating condition) 2/3

Unit: (t)

Boom length (m)		48		51		54		57		60		63	
Radius (m)													
10	54/10.1	54/10.1	49.3/10.6	49.3/10.6									
11	52.5	52.5	48.3	48.3	45.5/11.2	45.5/11.2	41.8/11.7	41.8/11.7					
12	50.9	50.9	47.2	47.2	44.2	44.2	41.4	41.4	39.2/12.2	39.2/12.2			
13	47.2	49.5	45.5	45.5	43.0	43.0	40.1	40.1	37.9	37.9	35/12.75	35/12.75	
14	42.5	48.1	42.3	43.8	42.1	42.5	38.7	38.7	36.7	36.7	33.6	33.6	
15	38.6	44.3	38.4	42.1	38.1	40.6	38.0	37.9	35.0	35.0	32.2	32.2	
16	35.3	40.6	35.1	40.4	34.8	38.7	34.7	36.6	33.3	33.3	30.8	30.8	
17	32.5	37.4	32.3	37.2	32.0	36.9	31.8	35.2	31.6	32.2	29.4	29.4	
18	30.0	34.6	29.8	34.4	29.5	34.1	29.3	33.9	29.2	31.2	28.0	28.0	
19	27.8	32.1	27.6	31.9	27.4	31.7	27.2	31.5	27.0	30.1	26.8	27.5	
20	25.9	30.0	25.7	29.8	25.5	29.5	25.3	29.3	25.1	29.1	24.9	27.0	
21	24.2	28.1	24.0	27.9	23.8	27.6	23.6	27.4	23.4	27.2	23.2	26.1	
22	22.7	26.3	22.5	26.1	22.2	25.9	22.1	25.7	21.9	25.5	21.6	25.3	
23	21.3	24.8	21.1	24.6	20.9	24.3	20.7	24.1	20.5	23.9	20.3	23.7	
24	20.1	23.4	19.9	23.2	19.6	22.9	19.5	22.7	19.3	22.5	19.0	22.3	
26	18.0	21.0	17.8	20.8	17.5	20.5	17.3	20.3	17.1	20.1	16.9	19.9	
28	16.1	18.9	15.9	18.7	15.7	18.4	15.5	18.3	15.3	18.0	15.1	17.8	
30	14.6	17.2	14.4	17.0	14.1	16.7	13.9	16.5	13.7	16.3	13.5	16.1	
32	13.3	15.7	13.1	15.5	12.8	15.2	12.6	15.0	12.4	14.8	12.2	14.6	
34	12.1	14.3	11.9	14.1	11.6	13.9	11.4	13.7	11.2	13.5	11.0	13.3	
36	11.1	13.2	10.9	13.0	10.6	12.7	10.4	12.5	10.2	12.3	10.0	12.1	
38	10.2	12.2	10.0	12.0	9.7	11.7	9.5	11.5	9.3	11.3	9.1	11.1	
40	9.4	11.3	9.2	11.0	8.9	10.8	8.7	10.6	8.5	10.4	8.3	10.2	
42	8.7	10.4	8.5	10.2	8.2	9.9	8.0	9.8	7.8	9.6	7.6	9.3	
44	8.3/43.2	10.0/43.2	7.3/45.75	8.9/45.75	7.5	9.2	7.3	9.0	7.1	8.8	6.8	8.6	
46					6.9	8.5	6.7	8.3	6.5	8.1	6.2	7.9	
48					6.2/48.38	7.8/48.38	6.1	7.7	5.9	7.5	5.6	7.3	
50							5.3/50.97	6.9/50.97	5.3	6.9	5.1	6.7	
52									4.8	6.4	4.6	6.1	
54									4.5/53.57	6.0/53.57	4.1	5.6	
56											3.7/56.16	5.1/56.16	
Counterweight	52	52+11	52	52+11	52	52+11	52	52+11	52	52+11	52	52+11	
Multiply	5	5	4	4	4	4	4	4	4	4	3	3	


BOOM LOAD CHART (H OPERATING CONDITION)

Boom load chart (H operating condition) 3/3


Unit: (t)

Boom length (m)		66		69		72		75		78		81	
Radius (m)													
13	31.5/13.2	31.5/13.2											
14	30.9	30.9	28.3/13.8	28.3/13.8	25.5/14.3	25.5/14.3							
15	29.8	29.8	27.3	27.3	24.9	24.9	22.7/14.8	22.7/14.8	22/15.3	22/15.3			
16	28.6	28.6	26.5	26.5	24.3	24.3	22.1	22.1	21.4	21.4	20.6	20.6	
17	27.5	27.5	25.6	25.6	23.6	23.6	21.6	21.6	20.9	20.9	20.2	20.2	
18	26.4	26.4	24.6	24.6	22.9	22.9	21.1	21.1	20.4	20.4	19.7	19.7	
19	25.2	25.2	23.7	23.7	22.1	22.1	20.6	20.6	19.9	19.9	19.2	19.2	
20	24.0	24.0	22.7	22.7	21.4	21.4	20.1	20.1	19.4	19.4	18.7	18.7	
21	22.9	23.5	21.8	21.8	20.7	20.7	19.6	19.6	18.9	18.9	18.2	18.2	
22	21.4	23.0	20.8	20.8	19.9	19.9	19.0	19.0	18.4	18.4	17.7	17.7	
23	20.0	22.5	19.8	20.3	19.2	19.2	18.5	18.5	17.8	17.8	17.2	17.2	
24	18.8	22.1	18.6	19.8	18.3	18.5	17.9	17.9	17.3	17.3	16.7	16.7	
26	16.6	19.6	16.4	18.6	16.2	17.8	16.0	17.0	15.7	16.5	15.5	16.0	
28	14.8	17.6	14.6	17.4	14.4	17.1	14.2	16.1	13.9	15.6	13.7	15.4	
30	13.3	15.8	13.1	15.6	12.8	15.4	12.6	15.2	12.4	14.9	12.2	14.7	
32	11.9	14.3	11.7	14.1	11.5	13.9	11.3	13.7	11.0	13.4	10.8	13.2	
34	10.8	13.0	10.6	12.8	10.3	12.6	10.1	12.3	9.9	12.1	9.7	11.9	
36	9.8	11.9	9.5	11.6	9.3	11.4	9.1	11.2	8.8	10.9	8.6	10.7	
38	8.9	10.8	8.6	10.6	8.4	10.4	8.1	10.1	7.8	9.9	7.6	9.7	
40	8.0	9.9	7.8	9.7	7.5	9.4	7.2	9.2	6.9	9.0	6.7	8.7	
42	7.3	9.1	7.0	8.9	6.7	8.6	6.4	8.4	6.2	8.1	5.9	7.8	
44	6.6	8.4	6.3	8.1	6.0	7.8	5.7	7.6	5.4	7.3	5.2	7.0	
46	5.9	7.7	5.6	7.4	5.4	7.1	5.1	6.8	4.8	6.5	4.5	6.3	
48	5.3	7.0	5.1	6.7	4.8	6.4	4.5	6.2	4.2	5.9	4.0	5.6	
50	4.8	6.4	4.5	6.1	4.2	5.8	4.0	5.6	3.7	5.3	3.4	5.0	
52	4.3	5.8	4.0	5.6	3.7	5.3	3.5	5.0	3.2	4.7	2.9	4.5	
54	3.8	5.3	3.6	5.0	3.3	4.8	3.0	4.5	2.7	4.2	2.5	3.9	
56	3.4	4.8	3.2	4.6	2.9	4.3	2.6	4.0	2.3	3.7	2.0	3.5	
58	2.9/58.8	4.2/58.8	2.8	4.1	2.5	3.8	2.2	3.6	1.9	3.3	1.7	3.0	
60			2.4	3.7	2.1	3.4	1.8	3.2	1.5	2.9	1.3	2.6	
Counterweight	52	52+11	52	52+11	52	52+11	52	52+11	52	52+11	52	52+11	
Multiply	3	3	3	3	2	2	2	2	2	2	2	2	

FJ OPERATING CONDITIONS OF FIXED JIB

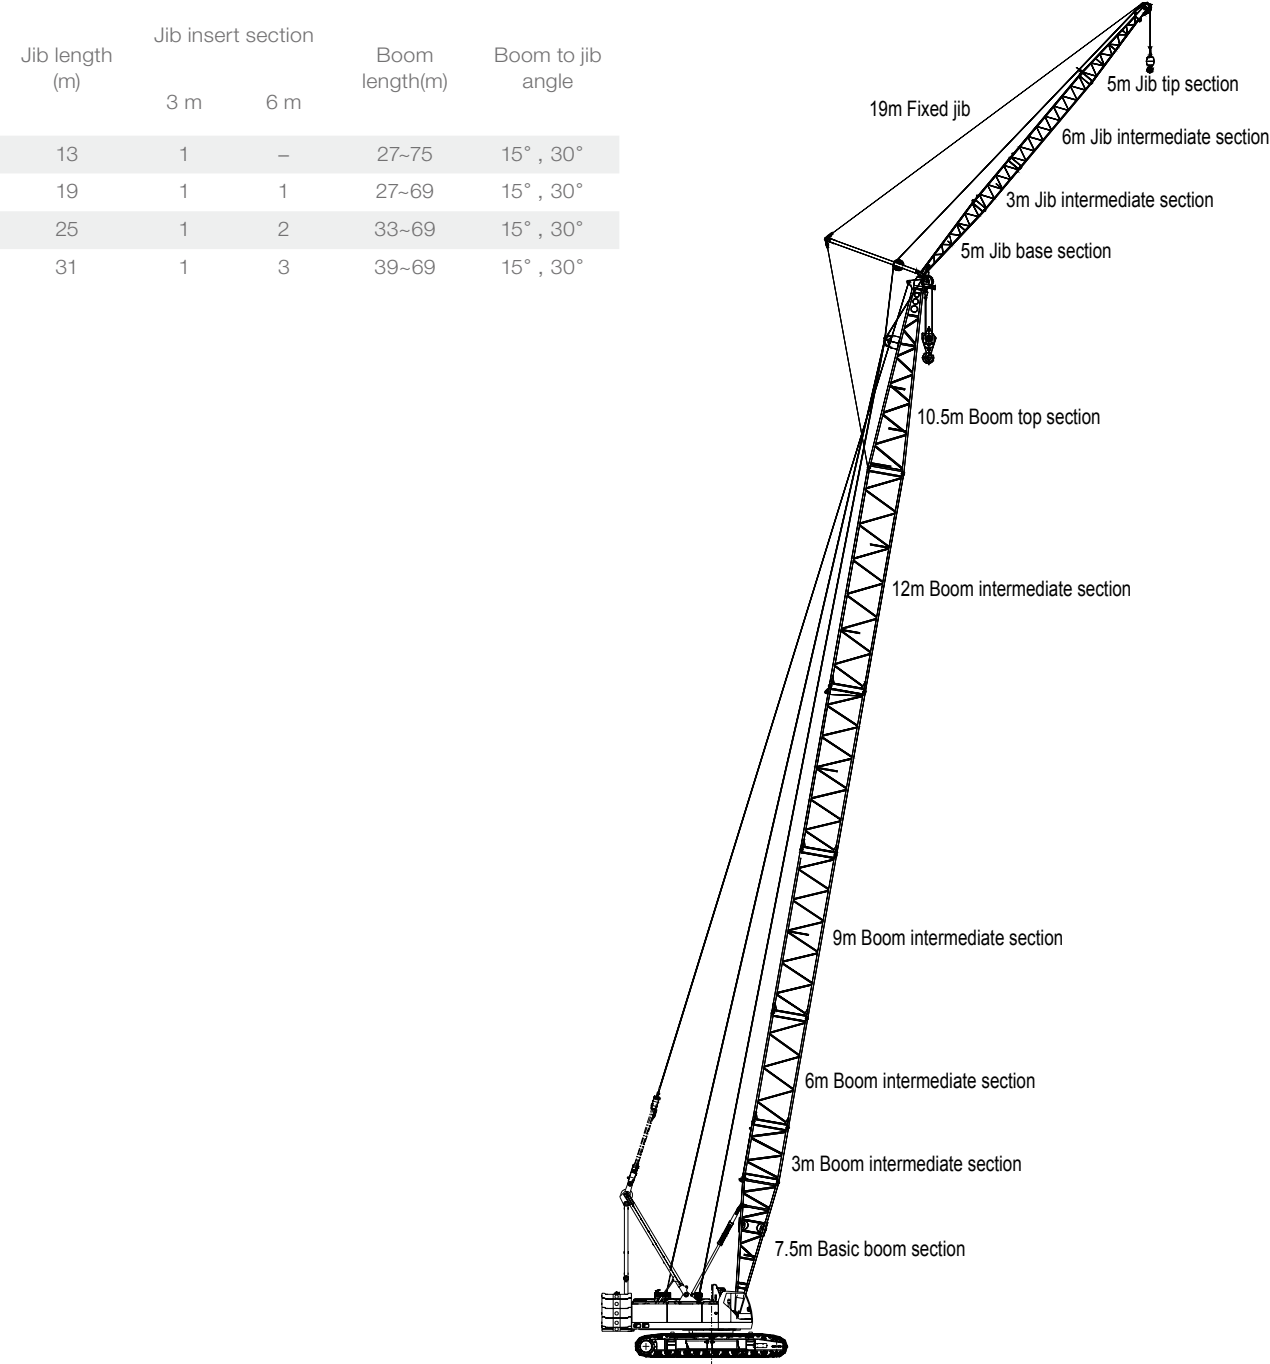

OPERATION SCOPE OF FIXED JIB

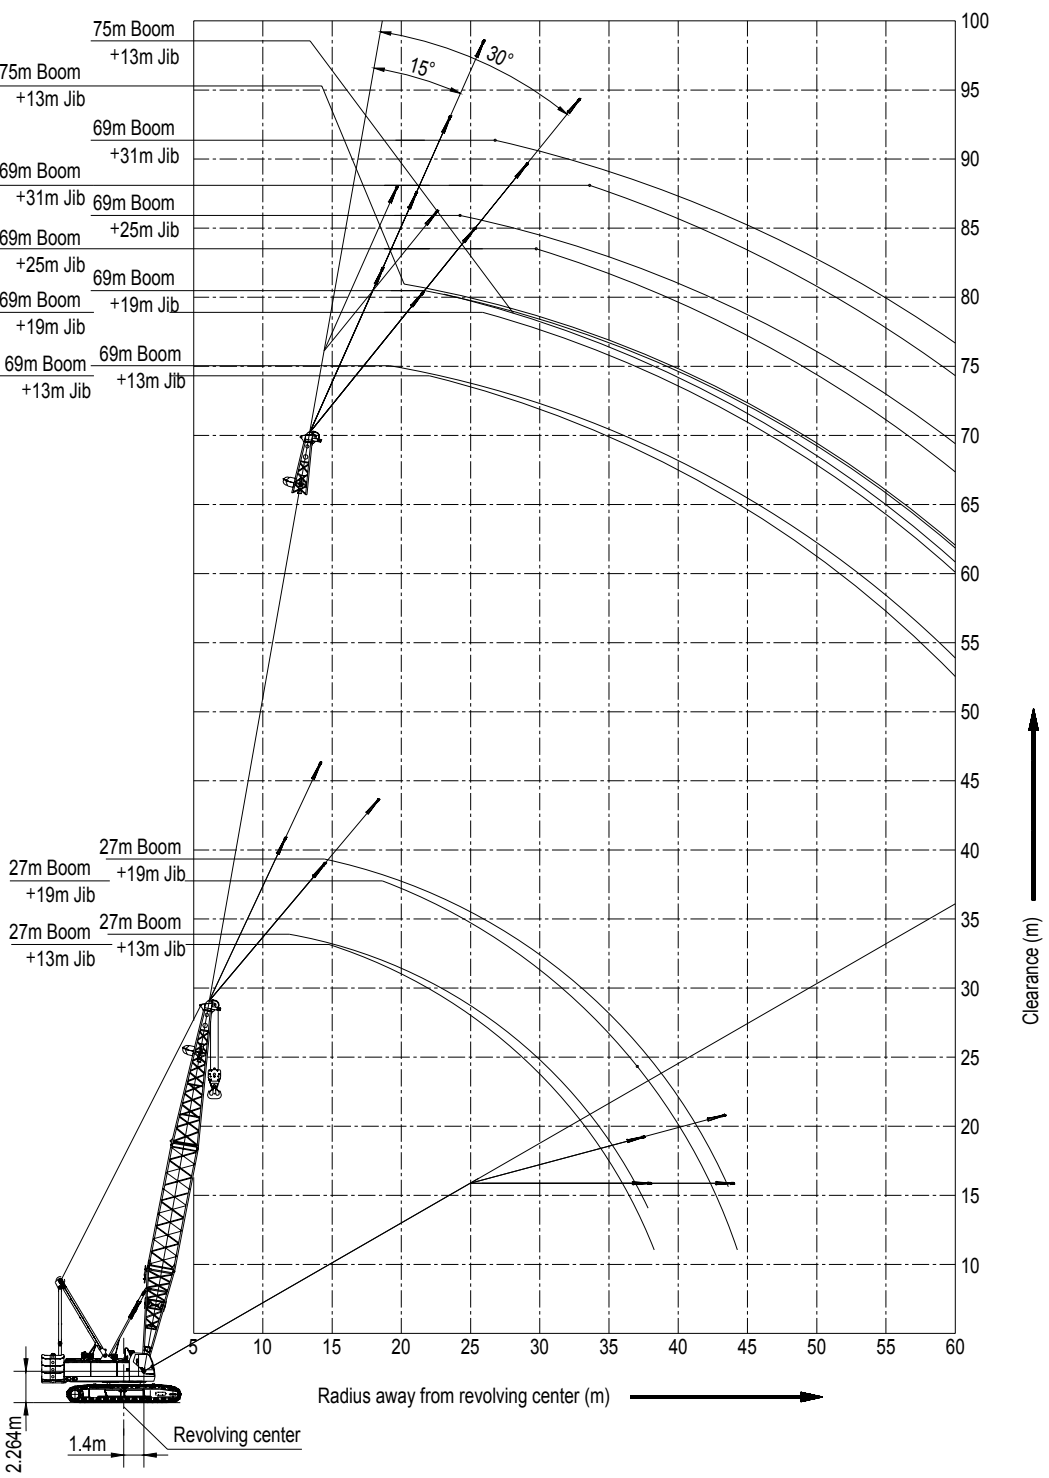

LOAD CHART OF FIXED JIB (FJ OPERATING CONDITIONS)

Note:

1. Filling part of 25% gray level in bold frame in the table is determined by strength. Italic value filled by 40% gray level refers to the operating conditions with standard and additional counterweights.

2. Rated load in the table is the maximum permissible value under the condition that the non-traveling heavy load is slowly and stably lifted from the solid and flat ground.

3. Rated load shown in the table is calculated based on the 75% of tilting load under wind speed of less than 9.8m/s. Value unit expressed by load is “t” . Actual hoisting weight is value by deducting mass of main or auxiliary lifting hook from rated hoisting weight in the table. Weight of lifting hook is shown as follows:

■ 150t lifting hook -2.8t

■ 100t lifting hook --1.99t

■ 50t lifting hook --1.06t

■ 25t lifting hook -0.79t

■ 13.5t lifting hook -0.53t

4. All values in load chart are available for 360° rotation.

5. Length of installable boom is from 18m to 81m.

6. It is selected operating condition with additional counterweight (52t+11t) and it does not belong to standard operating conditions. Length of boom with additional counterweight allowed is from 45m to 81m.

LOAD CHART OF FIXED JIB (FJ OPERATING CONDITIONS)

Operating conditions of fixed jib 1/9

Unit: (t)

Boom length (m)	27				30				33			
Jib length (m)	13		19		13		19		13		19	
Installation angle of jib	15°	30°	15°	30°	15°	30°	15°	30°	15°	30°	15°	30°
Working amplitude (m)												
12	13.0/12.3				13.0/12.9				13.0/13.4			
14	13.0	9.0/15.1	8.0/14.9		13.0	9.0/15.7	8.0/15.5		13.0			
16	13.0	9.0	8.0		13.0	9.0	8.0		13.0	9.0/16.3	8.0/16.1	
18	13.0	9.0	8.0	6.0/19.1	13.0	9.0	8.0	6.0/19.6	13.0	9.0	8.0	
20	13.0	9.0	8.0	6.0	13.0	9.0	8.0	6.0	13.0	9.0	8.0	6.0/20.2
22	13.0/23.2	9.0	8.0	6.0	13.0	9.0	8.0	6.0	13.0	9.0	8.0	6.0
24	12.7	9.0	8.0	6.0	13.0/24.8	9.0	8.0	6.0	13.0	9.0	8.0	6.0
26	12.3/24.9	9.0/24.9	8.0/24.9	6.0/24.9	12.5	9.0	8.0	6.0	13.0	9.0	8.0	6.0
28					11.9/27.5	9.0/27.5	8.0/27.5	6.0/27.5	12.3	9.0	8.0	6.0
30									11.6/30.1	9.0/30.1	8.0/30.1	6.0/30.1
32												
34												
Counterweight	52	52	52	52	52	52	52	52	52	52	52	52
Boom length (m)	33				36				39			
Jib length (m)	25		13		19		25		13		19	
Installation angle of jib	15°	30°	15°	30°	15°	30°	15°	30°	15°	30°	15°	30°
Working amplitude (m)												
14			13.0/14.1						13.0/14.6			
16			13.0	9.0/16.9	8.0/16.7				13.0	9.0/17.4	8.0/17.2	
18	5.0/18.7		13.0	9.0	8.0	5.0/19.3			13.0	9.0	8.0	
20	5.0		13.0	9.0	8.0	6.0/20.8	5.0		13.0	9.0	8.0	6.0/21.4
22	5.0		13.0	9.0	8.0	6.0	5.0		13.0	9.0	8.0	6.0
24	5.0	4.6/24.2	13.0	9.0	8.0	6.0	5.0	4.6/24.7	13.0	9.0	8.0	6.0
26	5.0	4.6	13.0/27.6	9.0	8.0	6.0	5.0	4.6	13.0	9.0	8.0	6.0
28	5.0	4.6	12.8	9.0	8.0	6.0	5.0	4.6	13.0/29.0	9.0	8.0	6.0
30	5.0/30.1	4.6/30.1	12.2	9.0	8.0	6.0	5.0	4.6	12.7	9.0	8.0	6.0
32			11.6	9.0	8.0	6.0	5.0	4.6	12.1	9.0	8.0	6.0
34			11.4/32.7	9.0/32.7	8.0/32.7	6.0/32.7	5.0/32.7	4.6/32.7	11.5	9.0	8.0	6.0
36									10.9/35.3	9.0/35.3	8.0/35.3	6.0/35.3
Counterweight	52	52	52	52	52	52	52	52	52	52	52	52

LOAD CHART OF FIXED JIB (FJ OPERATING CONDITIONS)

Operating conditions of fixed jib 2/9

Unit: (t)

Boom length (m)		39										
Jib length (m)	25		31									
Installation angle of jib	15°	30°	15°	30°								
Working amplitude (m)												
14												
16												
18	5.0/19.9											
20	5.0											
22	5.0		3.0/22.5									
24	5.0	4.6/25.3	3.0									
26	5.0	4.6	3.0									
28	5.0	4.6	3.0	2.6/29.2								
30	5.0	4.6	3.0	2.6								
32	5.0	4.6	3.0	2.6								
34	5.0	4.6	3.0	2.6								
36	5.0/35.3	4.6/35.3	3.0/35.3	2.6/35.3								
Counterweight	52	52	52	52								
Boom length (m)		42										
Jib length (m)	13		19		25		31		13			
Installation angle of jib	15°	30°	15°	30°	15°	30°	15°	30°	15°	30°		
Working amplitude (m)												
16	13.0/15.2	8.0/17.8						13.0	13.0			
18	13.0	8.0						13.0	13.0	9.0/18.6	9.0/18.6	
20	13.0	9.0	8.0	6.0/21.9	5.0/20.4			13.0	13.0	9.0	9.0	
22	13.0	9.0	8.0	6.0	5.0	3.0/23.1			13.0	13.0	9.0	9.0
24	13.0	9.0	8.0	6.0	5.0	4.6/25.9	3.0		13.0	13.0	9.0	9.0
26	13.0	9.0	8.0	6.0	5.0	4.6	3.0		13.0	13.0	9.0	9.0
28	13.0	9.0	8.0	6.0	5.0	4.6	3.0	2.6/29.8	13.0	13.0	9.0	9.0
30	13.0	9.0	8.0	6.0	5.0	4.6	3.0	2.6	13.0/30.7	13.0	9.0	9.0
32	13.0	9.0	8.0	6.0	5.0	4.6	3.0	2.6	12.2	13.0	9.0	9.0
34	12.3	9.0	8.0	6.0	5.0	4.6	3.0	2.6	11.2	13.0/33.5	9.0	9.0
36	11.3	9.0	8.0	6.0	5.0	4.6	3.0	2.5	10.3	11.8	9.0	9.0
38	10.4	9.0	8.0/37.9	6.0/37.9	5.0/37.9	4.6/37.9	2.9/37.9	2.4/37.9	9.5	10.9	9.0/39.5	9.0
40	9.0/37.9	9.0/37.9							8.8	10.1	8.8	9.0
42									8.6/40.5	9.9/40.5	8.6/40.5	9.0/40.5
Counterweight	52	52	52	52	52	52	52	52	52	52+11	52	52+11

LOAD CHART OF FIXED JIB (FJ OPERATING CONDITIONS)

Operating conditions of fixed jib 3/9

Unit: (t)

Boom length (m)							45							
Jib length (m)			19				25			31				
Installation angle of jib			15°		30°		15°		30°		15°		30°	
Working amplitude (m)														
18	8.0/18.4	8.0/18.4												
20	8.0	8.0	5.0/21.0				5.0/21.0							
22	8.0	8.0	6.0/22.5	6.0/22.5	5.0	5.0	3.0/23.6			3.0/23.6				
24	8.0	8.0	6.0	6.0	5.0	5.0	3.0			3.0				
26	8.0	8.0	6.0	6.0	5.0	5.0	4.6/26.4	4.6/26.4	3.0	3.0				
28	8.0	8.0	6.0	6.0	5.0	5.0	4.6	4.6	3.0	3.0				
30	8.0	8.0	6.0	6.0	5.0	5.0	4.6	4.6	3.0	3.0	2.4/30.4	2.4/30.4		
32	8.0	8.0	6.0	6.0	5.0	5.0	4.6	4.6	3.0	3.0	2.4	2.4		
34	8.0	8.0	6.0	6.0	5.0	5.0	4.6	4.6	3.0	3.0	2.4	2.4		
36	8.0	8.0	6.0	6.0	5.0	5.0	4.6	4.6	3.0	3.0	2.4	2.4		
38	8.0	8.0	6.0	6.0	5.0	5.0	4.6	4.6	2.9	3.0	2.4	2.4		
40	8.0	8.0	6.0	6.0	5.0	5.0	4.6	4.6	2.8	3.0	2.4	2.4		
42	8.0/40.5	8.0/40.5	6.0/40.5	6.0/40.5	5.0/40.5	5.0/40.5	4.6/40.5	4.6/40.5	2.7/40.5	3.0/40.5	2.4/40.5	2.4/40.5		
Counterweight	52	52+11	52	52+11	52	52+11	52	52+11	52	52+11	52	52+11		
Boom length (m)							48							
Jib length (m)			13				19			25				
Installation angle of jib			15°		30°		15°		30°		15°		30°	
Working amplitude (m)														
16	13.0/16.3	13.0/16.3												
18	13.0	13.0	9.0/19.1	9.0/19.1	8.0/18.9	8.0/18.9								
20	13.0	13.0	9.0	9.0	8.0	8.0	5.0/21.6			5.0/21.6				
22	13.0	13.0	9.0	9.0	8.0	8.0	6.0/23.1	6.0/23.1	5.0	5.0				
24	13.0	13.0	9.0	9.0	8.0	8.0	6.0	6.0	5.0	5.0				
26	13.0	13.0	9.0	9.0	8.0	8.0	6.0	6.0	5.0	5.0	4.6/27.0	4.6/27.0		
28	13.0	13.0	9.0	9.0	8.0	8.0	6.0	6.0	5.0	5.0	4.6	4.6		
30	13.0/30.5	13.0	9.0	9.0	8.0	8.0	6.0	6.0	5.0	5.0	4.6	4.6		
32	12.1	13.0	9.0	9.0	8.0	8.0	6.0	6.0	5.0	5.0	4.6	4.6		
34	11.0	12.7	9.0	9.0	8.0	8.0	6.0	6.0	5.0	5.0	4.6	4.6		
36	10.1	11.6	9.0	9.0	8.0	8.0	6.0	6.0	5.0	5.0	4.6	4.6		
38	9.3	10.7	9.0/38.8	9.0	8.0	8.0	6.0	6.0	5.0	5.0	4.6	4.6		
40	8.6	9.9	8.6	9.0	8.0	8.0	6.0	6.0	5.0	5.0	4.6	4.6		
42	8.0	9.2	8.0	9.0	8.0	8.0	6.0	6.0	5.0	5.0	4.6	4.6		
44	7.7/43.1	8.9/43.1	7.7/43.1	8.5/43.1	7.7/43.1	8.0/43.1	6.0/43.1	6.0/43.1	5.0/43.1	5.0/43.1	4.6/43.1	4.6/43.1		
Counterweight	52	52+11	52	52+11	52	52+11	52	52+11	52	52+11	52	52+11		

LOAD CHART OF FIXED JIB (FJ OPERATING CONDITIONS)

Operating conditions of fixed jib 4/9

Unit: (t)

Boom length (m)		48															
Jib length (m)		31															
Installation angle of jib		15°						30°									
Working amplitude (m)																	
24	3.0/24.2	3.0/24.2															
26	3.0	3.0															
28	3.0	3.0															
30	3.0	3.0	2.6/31.0	2.6/31.0													
32	3.0	3.0	2.6	2.6													
34	3.0	3.0	2.6	2.6													
36	3.0	3.0	2.6	2.6													
38	3.0	3.0	2.6	2.6													
40	2.9	3.0	2.5	2.6													
42	2.8	3.0	2.5	2.6													
44	2.75/43.1	3.0/43.1	2.4/43.1	2.6/43.1													
Counterweight	52	52+11	52	52+11													
Boom length (m)		51															
Jib length (m)		13						19						25			
Installation angle of jib		15°						30°						15°		30°	
Working amplitude (m)																	
16	13.0/16.9	13.0/16.9															
18	13.0	13.0	9.0/19.7	9.0/19.7	8.0/19.5	8.0/19.5											
20	13.0	13.0	9.0	9.0	8.0	8.0											
22	13.0	13.0	9.0	9.0	8.0	8.0	6.0/23.6	6.0/23.6	5.0/22.1	5.0/22.1							
24	13.0	13.0	9.0	9.0	8.0	8.0	6.0	6.0	5.0	5.0							
26	13.0	13.0	9.0	9.0	8.0	8.0	6.0	6.0	5.0	5.0	4.6/27.6	4.6/27.6					
28	13.0	13.0	9.0	9.0	8.0	8.0	6.0	6.0	5.0	5.0	4.6	4.6					
30	13.0/30.1	13.0	9.0	9.0	8.0	8.0	6.0	6.0	5.0	5.0	4.6	4.6					
32	11.9	13.0	9.0	9.0	8.0	8.0	6.0	6.0	5.0	5.0	4.6	4.6					
34	10.9	12.5	9.0	9.0	8.0	8.0	6.0	6.0	5.0	5.0	4.6	4.6					
36	10.0	11.5	9.0	9.0	8.0	8.0	6.0	6.0	5.0	5.0	4.6	4.6					
38	9.2	10.6	9.0/38.5	9.0	8.0	8.0	6.0	6.0	5.0	5.0	4.6	4.6					
40	8.5	9.8	8.5	9.0	8.0/41.3	8.0	6.0	6.0	5.0	5.0	4.6	4.6					
42	7.8	9.0	7.8	9.0	7.8	8.0	6.0	6.0	5.0	5.0	4.6	4.6					
44	7.3	8.4	7.3	8.4	7.3	8.0	6.0	6.0	5.0	5.0	4.6	4.6					
46	6.8/45.7	7.8/45.7	6.8/45.7	7.8/45.7	6.8/45.7	7.8/45.7	6.0/45.7	6.0/45.7	5.0/45.7	5.0/45.7	4.6/45.7	4.6/45.7					
Counterweight	52	52+11	52	52+11	52	52+11	52	52+11	52	52+11	52	52+11					

LOAD CHART OF FIXED JIB (FJ OPERATING CONDITIONS)

Operating conditions of fixed jib 5/9

Unit: (t)

Boom length (m)		51				54								
Jib length (m)		31				13								
Installation angle of jib		15°		30°		15°		30°		15°		30°		
Working amplitude (m)														
16						13.0	13.0							
18						13.0	13.0							
20						13.0	13.0	9.0/20.3	9.0/20.3	8.0/20.1	8.0/20.1			
22		3.0/28.4	3.0/28.4			13.0	13.0	9.0	9.0	8.0	8.0			
24		3.0	3.0			13.0	13.0	9.0	9.0	8.0	8.0	6.0/24.2	6.0/24.2	
26		3.0	3.0			13.0	13.0	9.0	9.0	8.0	8.0	6.0	6.0	
28		3.0	3.0	2.6/31.5	2.6/31.5	13.0	13.0	9.0	9.0	8.0	8.0	6.0	6.0	
30		3.0	3.0	2.6	2.6	13.0	13.0	9.0	9.0	8.0	8.0	6.0	6.0	
32		3.0	3.0	2.6	2.6	11.8	13.0	9.0	9.0	8.0	8.0	6.0	6.0	
34		3.0	3.0	2.6	2.6	10.7	12.3	9.0	9.0	8.0	8.0	6.0	6.0	
36		3.0	3.0	2.6	2.6	9.8	11.3	9.0	9.0	8.0	8.0	6.0	6.0	
38		3.0	3.0	2.5	2.6	9.0	10.4	9.0	9.0	8.0	8.0	6.0	6.0	
40		2.9	3.0	2.5	2.6	8.3	9.5	8.3	9.0	8.0/40.9	8.0	6.0	6.0	
42		2.9	3.0	2.4	2.6	7.6	8.7	7.6	8.7	7.6	8.0	6.0	6.0	
44		2.8/45.7	3.0/45.7	2.35/45.7	2.5/45.7	7.1	8.2	7.1	8.2	7.1	8.0	6.0	6.0	
46						6.5	7.5	6.5	7.5	6.5	7.5	6.0	6.0	
48						6.1	7.0	6.1	7.0	6.1	7.0	6.0	6.0	
50						6.0/48.3	6.9/48.3	6.0/48.3	6.9/48.3	6.0/48.3	6.9/48.3	6.0/48.3	6.0/48.3	
Counterweight	52	52+11	52	52+11	52	52+11	52	52+11	52	52+11	52	52+11		
Boom length (m)						54				57				
Jib length (m)		25				31				13				
Installation angle of jib		15°		30°		15°		30°		15°		30°		
Working amplitude (m)														
16										13.0	13.0			
18										13.0	13.0	9.0/20.9	9.0/20.9	
20										13.0	13.0	9.0	9.0	
22		5.0/22.7	5.0/22.7							13.0	13.0	9.0	9.0	
24		5.0	5.0	3.0/25.3				3.0/25.3			13.0	13.0	9.0	9.0
26		5.0	5.0	3.0				3.0			13.0/29.8	13.0	9.0	9.0
28		5.0	5.0	4.6/28.2	4.6/28.2	3.0	3.0			12.8	13.0	9.0	9.0	
30		5.0	5.0	4.6	4.6	3.0	3.0			11.6	13.0	9.0	9.0	
32		5.0	5.0	4.6	4.6	3.0	3.0	2.6/32.1	2.6/32.1	10.5	12.1	9.0	9.0	
34		5.0	5.0	4.6	4.6	3.0	3.0	2.6	2.6	9.6	11.0	9.0/37.4	9.0	
36		5.0	5.0	4.6	4.6	3.0	3.0	2.6	2.6	8.8	10.1	8.8	9.0	
38		5.0	5.0	4.6	4.6	3.0	3.0	2.6	2.6	8.1	9.3	8.1	9.0	
40		5.0	5.0	4.6	4.6	3.0	3.0	2.6	2.6	7.4	8.5	7.4	8.5	
42		5.0	5.0	4.6	4.6	2.9	3.0	2.5	2.6	6.9	7.9	6.9	7.9	
44		5.0	5.0	4.6	4.6	2.9	3.0	2.5	2.6	6.3	7.2	6.3	7.2	
46		5.0	5.0	4.6	4.6	2.8	3.0	2.4	2.6	5.9	6.8	5.9	6.8	
48		5.0	5.0	4.6	4.6	2.8	3.0	2.4	2.6	5.5	6.3	5.5	6.3	
50		5.0/48.3	5.0/48.3	4.6/48.3	4.6/48.3	2.7/48.3	3.0/48.3	2.3/48.3	2.6/48.3	5.3/50.9	6.1/50.9	5.3/50.9	6.1/50.9	
Counterweight	52	52+11	52	52+11	52	52+11	52	52+11	52	52+11	52	52+11		

LOAD CHART OF FIXED JIB (FJ OPERATING CONDITIONS)

Operating conditions of fixed jib 6/9

Unit: (t)

Boom length (m)			57											
Jib length (m)			19					25			31			
Installation angle of jib			15°		30°		15°		30°		15°		30°	
Working amplitude (m)														
18	8.0/20.7	8.0/20.7												
20	8.0	8.0	5.0/23.3					5.0/23.3						
22	8.0	8.0	6.0/24.8	6.0/24.8	5.0	5.0	3.0/25.5					3.0/25.5		
24	8.0	8.0	6.0	6.0	5.0	5.0	3.0			3.0				
26	8.0	8.0	6.0	6.0	5.0	5.0	4.6/28.7	4.6/28.7	3.0	3.0				
28	8.0	8.0	6.0	6.0	5.0	5.0	4.6	4.6	3.0	3.0				
30	8.0	8.0	6.0	6.0	5.0	5.0	4.6	4.6	3.0	3.0	2.6/32.7	2.6/32.7		
32	8.0	8.0	6.0	6.0	5.0	5.0	4.6	4.6	3.0	3.0	2.6	2.6		
34	8.0	8.0	6.0	6.0	5.0	5.0	4.6	4.6	3.0	3.0	2.6	2.6		
36	8.0	8.0	6.0	6.0	5.0	5.0	4.6	4.6	3.0	3.0	2.6	2.6		
38	8.0/40.1	8.0	6.0	6.0	5.0	5.0	4.6	4.6	3.0	3.0	2.6	2.6		
40	7.4	8.0	6.0	6.0	5.0	5.0	4.6	4.6	3.0	3.0	2.6	2.6		
42	6.9	7.9	6.0	6.0	5.0	5.0	4.6	4.6	2.9	3.0	2.5	2.6		
44	6.3	7.2	6.0/47.5	6.0	5.0	5.0	4.6	4.6	2.9	3.0	2.5	2.6		
46	5.9	6.8	5.9	6.0	5.0	5.0	4.6	4.6	2.8	3.0	2.4	2.6		
48	5.5	6.3	5.5	6.0	5.0	5.0	4.6	4.6	2.8	3.0	2.4	2.6		
50	5.3/50.9	6.1/50.9	5.3/50.9	6.0/50.9	5.0/50.9	5.0/50.9	4.6/50.9	4.6/50.9	2.7/50.9	3.0/50.9	2.3/50.9	2.6/50.9		
Counterweight	52	52+11	52	52+11	52	52+11	52	52+11	52	52+11	52	52+11		
Boom length (m)			60											
Jib length (m)			13					19			25			
Installation angle of jib			15°		30°		15°		30°		15°		30°	
Working amplitude (m)														
18	13.0/18.6	13.0/18.6												
20	13.0	13.0	9.0/21.4	9.0/21.4	8.0/21.2	8.0/21.2	5.0/23.9					5.0/23.9		
22	13.0	13.0	9.0	9.0	8.0	8.0	5.0/23.9					5.0/23.9		
24	13.0	13.0	9.0	9.0	8.0	8.0	6.0/25.4	6.0/25.4	5.0	5.0				
26	13.0	13.0	9.0	9.0	8.0	8.0	6.0	6.0	5.0	5.0				
28	13.0	13.0	9.0	9.0	8.0	8.0	6.0	6.0	5.0	5.0	4.6/29.3	4.6/29.3		
30	13.0	13.0	9.0	9.0	8.0	8.0	6.0	6.0	5.0	5.0	4.6	4.6		
32	11.8	13.0	9.0	9.0	8.0	8.0	6.0	6.0	5.0	5.0	4.6	4.6		
34	10.7	12.3	9.0	9.0	8.0	8.0	6.0	6.0	5.0	5.0	4.6	4.6		
36	9.7	11.2	9.0/36.7	9.0	8.0	8.0	6.0	6.0	5.0	5.0	4.6	4.6		
38	8.9	10.2	8.9	9.0	8.0	8.0	6.0	6.0	5.0	5.0	4.6	4.6		
40	8.2	9.4	8.2	9.0	8.0/40.7	8.0	6.0	6.0	5.0	5.0	4.6	4.6		
42	7.5	8.6	7.5	8.6	7.5	8.0	6.0	6.0	5.0	5.0	4.6	4.6		
44	6.9	7.9	6.9	7.9	6.9	7.9	6.0	6.0	5.0	5.0	4.6	4.6		
46	6.3	7.2	6.3	7.2	6.3	7.2	6.0/47.2	6.0	5.0	5.0	4.6	4.6		
48	5.9	6.8	5.9	6.8	5.9	6.8	5.9	6.0	5.0	5.0	4.6	4.6		
50	5.4	6.2	5.4	6.2	5.4	6.2	5.4	6.0	5.0	5.0	4.6	4.6		
52	5.0	5.8	5.0	5.8	5.0	5.8	5.0	5.8	5.0	5.0	4.6	4.6		
54	4.7/53.5	5.4/53.5	4.7/53.5	5.4/53.5	4.7/53.5	5.4/53.5	4.7/53.5	5.4/53.5	4.7/53.5	5.0/53.5	4.6/53.5	4.6/53.5		
Counterweight	52	52+11	52	52+11	52	52+11	52	52+11	52	52+11	52	52+11		

LOAD CHART OF FIXED JIB (FJ OPERATING CONDITIONS)

Operating conditions of fixed jib 7/9

Unit: (t)

Boom length (m)		60					63						
Jib length (m)		31					13						
Installation angle of jib		15°		30°		15°		30°		15°		30°	
Working amplitude (m)													
18						13.0/19.2	13.0/19.2						
20						13.0	13.0			8.0/21.8	8.0/21.8		
22						13.0	13.0	9.0	9.0	8.0	8.0		
24						13.0	13.0	9.0	9.0	8.0	8.0	6.0/25.9	6.0/25.9
26	3.0/26.5	3.0/26.5				13.0	13.0	9.0	9.0	8.0	8.0	6.0	6.0
28	3.0	3.0				13.0/29.8	13.0	9.0	9.0	8.0	8.0	6.0	6.0
30	3.0	3.0				12.8	13.0	9.0	9.0	8.0	8.0	6.0	6.0
32	3.0	3.0	2.6/33.2	2.6/33.2	11.6	13.0	9.0	9.0	9.0	8.0	8.0	6.0	6.0
34	3.0	3.0	2.6	2.6	10.5	12.1	9.0	9.0	9.0	8.0	8.0	6.0	6.0
36	3.0	3.0	2.6	2.6	9.5	10.9	9.0/37.3	9.0	9.0	8.0	8.0	6.0	6.0
38	3.0	3.0	2.6	2.6	8.7	10.0	8.7	9.0	9.0	8.0	8.0	6.0	6.0
40	3.0	3.0	2.6	2.6	8.0	9.2	8.0	9.0	9.0	8.0	8.0	6.0	6.0
42	3.0	3.0	2.6	2.6	7.3	8.4	7.3	8.4	7.3	8.0	8.0	6.0	6.0
44	3.0	3.0	2.5	2.6	6.7	7.7	6.7	7.7	6.7	7.7	7.7	6.0	6.0
46	2.9	3.0	2.5	2.6	6.1	7.0	6.1	7.0	6.1	7.0	7.0	6.0/46.6	6.0
48	2.9	3.0	2.4	2.6	5.7	6.6	5.7	6.6	5.7	6.6	6.6	5.7	6.0
50	2.8	3.0	2.4	2.6	5.2	6.0	5.2	6.0	5.2	6.0	6.0	5.2	6.0
52	2.8	3.0	2.3	2.6	4.7	5.4	4.7	5.4	4.7	5.4	5.4	4.7	5.4
54	2.7/53.5	3.0/53.5	2.25/53.5	2.6/53.5	4.3	4.9	4.3	4.9	4.3	4.9	4.9	4.3	4.9
56					3.9/56.1	4.5/56.1	3.9/56.1	4.5/56.1	3.9/56.1	4.5/56.1	4.5/56.1	3.9/56.1	4.5/56.1
Counterweight	52	52+11	52	52+11	52	52+11	52	52+11	52	52+11	52	52+11	52+11
Boom length (m)		63					66						
Jib length (m)		25					31						
Installation angle of jib		15°		30°		15°		30°		15°		30°	
Working amplitude (m)													
18										13.0/19.2	13.0/19.2		
20										13.0	13.0		
22										13.0	13.0	9.0/22.6	9.0/22.6
24	5.0/24.4	5.0/24.4								13.0	13.0	9.0	9.0
26	5.0	5.0			3.0/27.1	3.0/27.1				13.0	13.0	9.0	9.0
28	5.0	5.0	4.6/29.9	4.6/29.9	3.0	3.0				13.0/29.5	13.0	9.0	9.0
30	5.0	5.0	4.6	4.6	3.0	3.0				12.7	13.0	9.0	9.0
32	5.0	5.0	4.6	4.6	3.0	3.0	2.6/33.8	2.6/33.8	11.4	13.0	13.0	9.0	9.0
34	5.0	5.0	4.6	4.6	3.0	3.0	2.6	2.6	10.4	12.0	12.0	9.0	9.0
36	5.0	5.0	4.6	4.6	3.0	3.0	2.6	2.6	9.4	10.8	10.8	9.0/36.8	9.0
38	5.0	5.0	4.6	4.6	3.0	3.0	2.6	2.6	8.6	9.9	9.9	8.6	9.0
40	5.0	5.0	4.6	4.6	3.0	3.0	2.6	2.6	7.8	9.0	9.0	7.8	9.0
42	5.0	5.0	4.6	4.6	3.0	3.0	2.6	2.6	7.1	8.2	8.2	7.1	8.2
44	5.0	5.0	4.6	4.6	3.0	3.0	2.5	2.6	6.5	7.5	7.5	6.5	7.5
46	5.0	5.0	4.6	4.6	3.0	3.0	2.5	2.6	6.0	6.9	6.9	6.0	6.9
48	5.0	5.0	4.6	4.6	2.9	3.0	2.4	2.6	5.5	6.3	6.3	5.5	6.3
50	5.0/50.5	5.0	4.6	4.6	2.9	3.0	2.4	2.6	5.0	5.8	5.8	5.0	5.8
52	4.7	5.0	4.6/52.4	4.6	2.8	3.0	2.3	2.6	4.5	5.2	5.2	4.5	5.2
54	4.3	4.9	4.3	4.6	2.8	3.0	2.3	2.6	4.1	4.7	4.7	4.1	4.7
56	3.9/56.1	4.5/56.1	3.9/56.1	4.5/56.1	2.7/56.1	3.0/56.1	2.2/56.1	2.5/56.1	3.7	4.3	4.3	3.7	4.3
58									3.3	3.8	3.8	3.3	3.8
60									3.2/58.7	3.7/58.7	3.7/58.7	3.2/58.7	3.7/58.7
Counterweight	52	52+11	52	52+11	52	52+11	52	52+11	52	52+11	52	52+11	52+11

LOAD CHART OF FIXED JIB (FJ OPERATING CONDITIONS)

Operating conditions of fixed jib 8/9

Unit: (t)

Boom length (m)			66											
Jib length (m)			19				25				31			
Installation angle of jib			15°		30°		15°		30°		15°		30°	
Working amplitude (m)														
22	8.0/22.4	8.0/22.4												
24	8.0	8.0	5.0/25.0 5.0/25.0											
26	8.0	8.0	6.0/26.5	6.0/26.5	5.0	5.0	3.0/27.6 3.0/27.6							
28	8.0	8.0	6.0	6.0	5.0	5.0	3.0 3.0							
30	8.0	8.0	6.0	6.0	5.0	5.0	4.6/30.4	4.6/30.4	3.0	3.0				
32	8.0	8.0	6.0	6.0	5.0	5.0	4.6	4.6	3.0	3.0				
34	8.0	8.0	6.0	6.0	5.0	5.0	4.6	4.6	3.0	3.0	2.6/34.4	2.6/34.4		
36	8.0	8.0	6.0	6.0	5.0	5.0	4.6	4.6	3.0	3.0	2.6	2.6		
38	8.0/39.4	8.0	6.0	6.0	5.0	5.0	4.6	4.6	3.0	3.0	2.6	2.6		
40	7.8	8.0	6.0	6.0	5.0	5.0	4.6	4.6	3.0	3.0	2.6	2.6		
42	7.1	8.0	6.0	6.0	5.0	5.0	4.6	4.6	3.0	3.0	2.6	2.6		
44	6.5	7.5	6.0	6.0	5.0	5.0	4.6	4.6	3.0	3.0	2.5	2.6		
46	6.0	6.9	6.0	6.0	5.0	5.0	4.6	4.6	3.0	3.0	2.5	2.6		
48	5.5	6.3	5.5	6.0	5.0	5.0	4.6	4.6	2.9	3.0	2.4	2.6		
50	5.0	5.8	5.0	5.8	5.0	5.0	4.6/51.6	4.6	2.9	3.0	2.4	2.6		
52	4.5	5.2	4.5	5.2	4.5	5.0	4.5	4.6	2.8	3.0	2.3	2.6		
54	4.1	4.7	4.1	4.7	4.1	4.7	4.1	4.6	2.8	3.0	2.3	2.6		
56	3.7	4.3	3.7	4.3	3.7	4.3	3.7	4.3	2.7	3.0	2.2	2.5		
58	3.3	3.8	3.3	3.8	3.3	3.8	3.3	3.8	2.7	3.0	2.2	2.5		
60	3.2/58.7	3.7/58.7	3.2/58.7	3.7/58.7	3.2/58.7	3.7/58.7	3.2/58.7	3.7/58.7	2.6/58.7	3.0/58.7	2.1/58.7	2.4/58.7		
Counterweight	52	52+11	52	52+11	52	52+11	52	52+11	52	52+11	52	52+11		
Boom length (m)			60											
Jib length (m)			13				19				25			
Installation angle of jib			15°		30°		15°		30°		15°		30°	
Working amplitude (m)														
20	13.0/20.3	13.0/20.3												
22	13.0	13.0	9.0/23.1	9.0/23.1	8.0/22.9	8.0/22.9	5.0/25.6 5.0/25.6							
24	13.0	13.0	9.0	9.0	8.0	8.0	5.0							
26	13.0	13.0	9.0	9.0	8.0	8.0	6.0/27.1	6.0/27.1	5.0	5.0				
28	13.0/29.3	13.0	9.0	9.0	8.0	8.0	6.0	6.0	5.0	5.0				
30	12.6	13.0	9.0	9.0	8.0	8.0	6.0	6.0	5.0	5.0	4.6/31.0	4.6/31.0		
32	11.4	13.0	9.0	9.0	8.0	8.0	6.0	6.0	5.0	5.0	4.6	4.6		
34	10.3	11.8	9.0	9.0	8.0	8.0	6.0	6.0	5.0	5.0	4.6	4.6		
36	9.3	10.7	9.0/36.5	9.0	8.0	8.0	6.0	6.0	5.0	5.0	4.6	4.6		
38	8.5	9.8	8.5	9.0	8.0/39.4	8.0	6.0	6.0	5.0	5.0	4.6	4.6		
40	7.7	8.9	7.7	8.9	7.7	8.0	6.0	6.0	5.0	5.0	4.6	4.6		
42	7.1	8.2	7.1	8.2	7.1	8.0	6.0	6.0	5.0	5.0	4.6	4.6		
44	6.5	7.5	6.5	7.5	6.5	7.5	6.0/45.6	6.0	5.0	5.0	4.6	4.6		
46	5.9	6.8	5.9	6.8	5.9	6.8	5.9	6.0	5.0	5.0	4.6	4.6		
48	5.4	6.2	5.4	6.2	5.4	6.2	5.4	6.0	5.0/49.6	5.0	4.6	4.6		
50	4.9	5.6	4.9	5.6	4.9	5.6	4.9	5.6	4.9	5.0	4.6/51.2	4.6		
52	4.4	5.1	4.4	5.1	4.4	5.1	4.4	5.1	4.4	5.0	4.4	4.6		
54	3.9	4.5	3.9	4.5	3.9	4.5	3.9	4.5	3.9	4.5	3.9	4.5		
56	3.5	4.0	3.5	4.0	3.5	4.0	3.5	4.0	3.5	4.0	3.5	4.0		
58	3.2	3.7	3.2	3.7	3.2	3.7	3.2	3.7	3.2	3.7	3.2	3.7		
60	2.8	3.2	2.8	3.2	2.8	3.2	2.8	3.2	2.8	3.2	2.8	3.2		
Counterweight	52	52+11	52	52+11	52	52+11	52	52+11	52	52+11	52	52+11		

LOAD CHART OF FIXED JIB (FJ OPERATING CONDITIONS)

Operating conditions of fixed jib 9/9

Unit: (t)

Boom length (m)		69				75			
Jib length (m)		31				13			
Installation angle of jib		15°		30°		15°		30°	
Working amplitude (m)									
6									
8									
10									
12									
14									
16									
18									
20						13.0/21.5	13.0/21.5		
22						13.0	13.0		
24						13.0	13.0	9.0/24.3	9.0/24.3
26						13.0	13.0	9.0	9.0
28		3.0/28.2	3.0/28.2			13.0/28.8	13.0	9.0	9.0
30		3.0	3.0			12.2	13.0	9.0	9.0
32		3.0	3.0			11.0	12.7	9.0	9.0
34		3.0	3.0	2.6/35.0	2.6/35.0	9.9	11.4	9.0/35.8	9.0
36		3.0	3.0	2.6	2.6	8.9	10.2	8.9	9.0
38		3.0	3.0	2.6	2.6	8.1	9.3	8.1	9.0
40		3.0	3.0	2.6	2.6	7.3	8.4	7.3	8.4
42		3.0	3.0	2.6	2.6	6.6	7.6	6.6	7.6
44		3.0	3.0	2.5	2.6	6.0	6.9	6.0	6.9
46		3.0	3.0	2.5	2.6	5.4	6.2	5.4	6.2
48		2.9	3.0	2.4	2.6	4.8	5.5	4.8	5.5
50		2.9	3.0	2.4	2.6	4.3	4.9	4.3	4.9
52		2.8	3.0	2.3	2.6	3.8	4.4	3.8	4.4
54		2.8	3.0	2.3	2.6	3.4	3.9	3.4	3.9
56		2.7	3.0	2.2	2.5	3.0	3.5	3.0	3.5
58		2.7	3.0	2.2	2.5	2.6	3.0	2.6	3.0
60		2.6	3.0	2.1	2.4	2.2	2.5	2.2	2.5
Counterweight	52	52+11	52	52+11	52	52+11	52	52+11	



Quality Changes the World

SANY HEAVY INDUSTRY CO., LTD.

Address: 319 Chuanda Road, Chuansha Economic Park,
Pudong, Shanghai, China, 201200

Service Hotline: +0086-21-60303131

Email: crd@sany.com.cn

For more information, please visit: www.sanygroup.com

For our consistent improvement in technology, specifications may change without notice.
The machines illustrated may show optional equipment which can be supplied at additional cost.